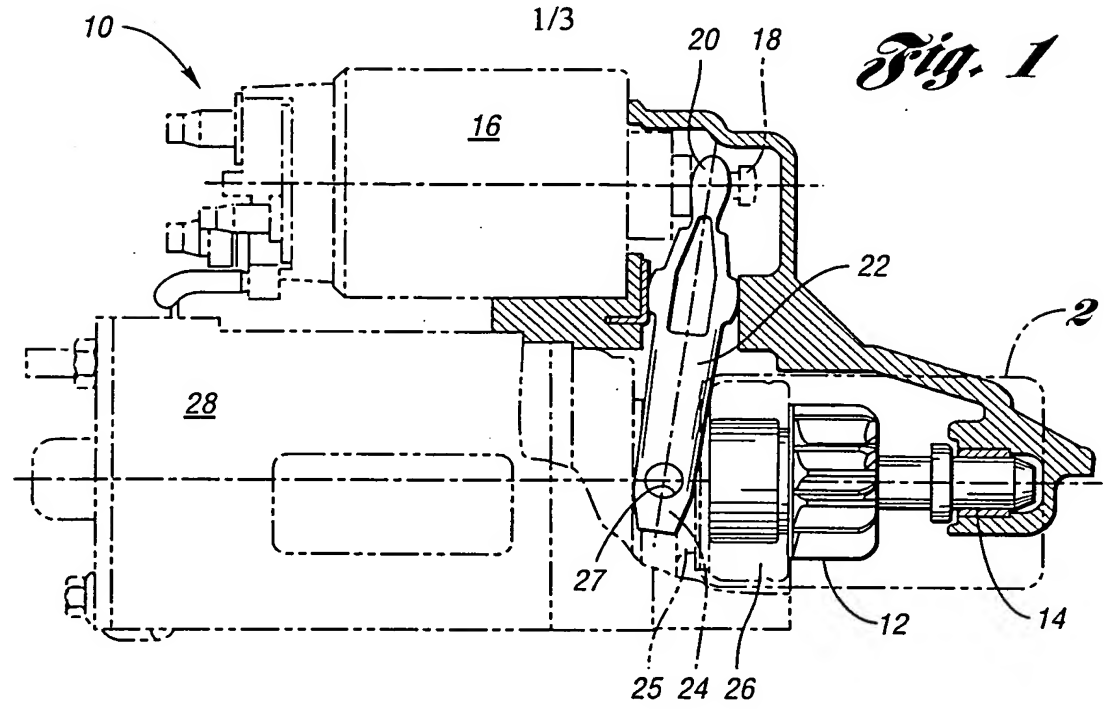

Fig. 1

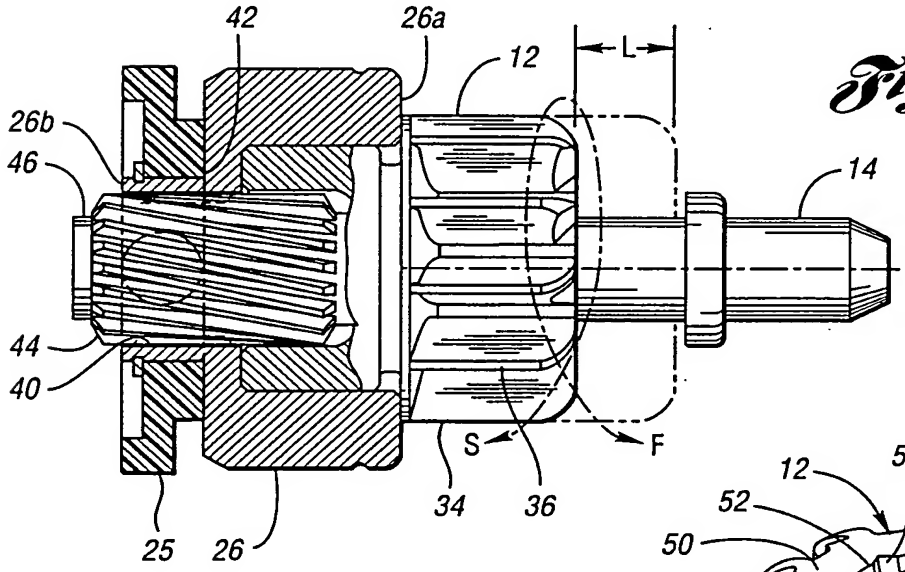

Fig. 2

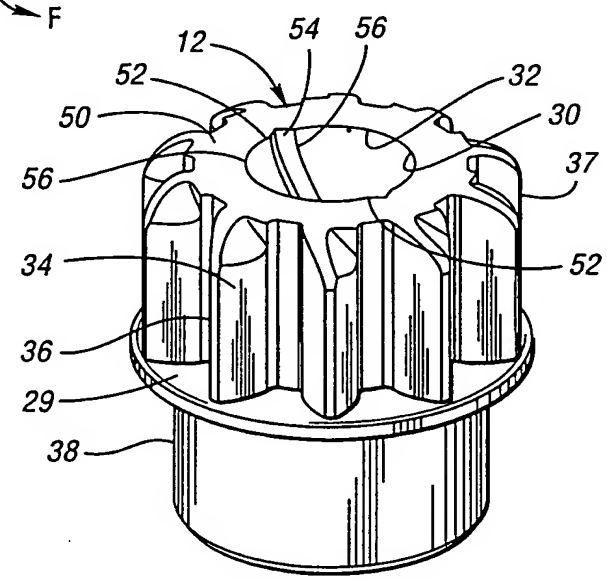

Fig. 3

Patent 6,547,681

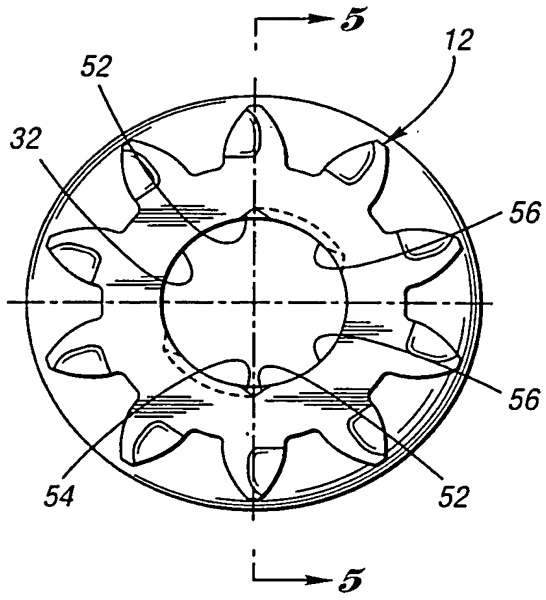

Fig. 4

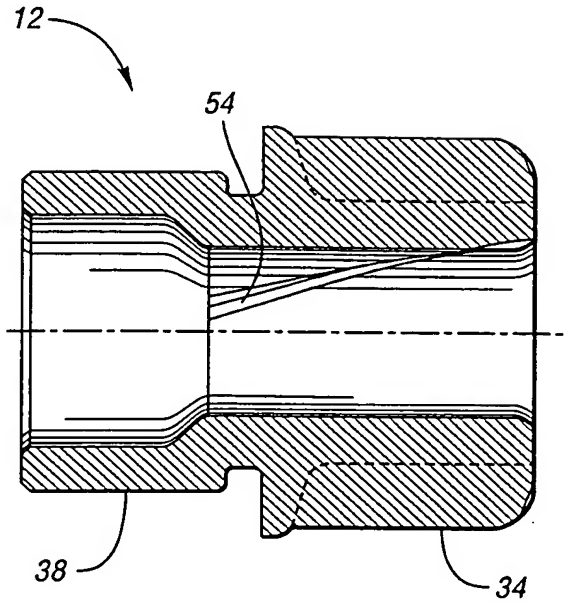

Fig. 5

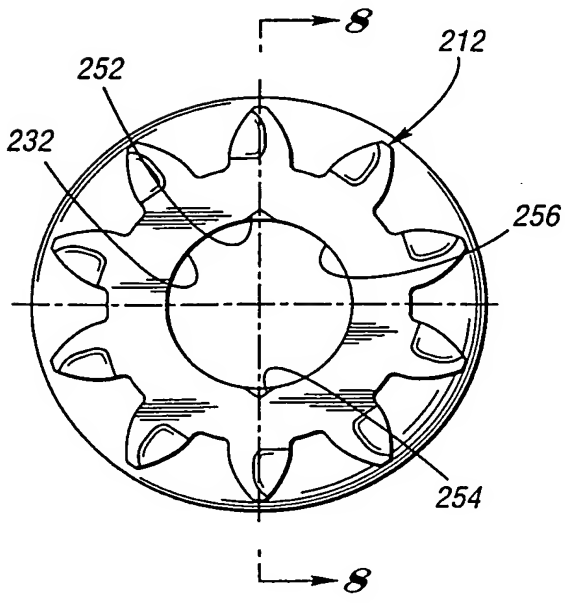

Fig. 7

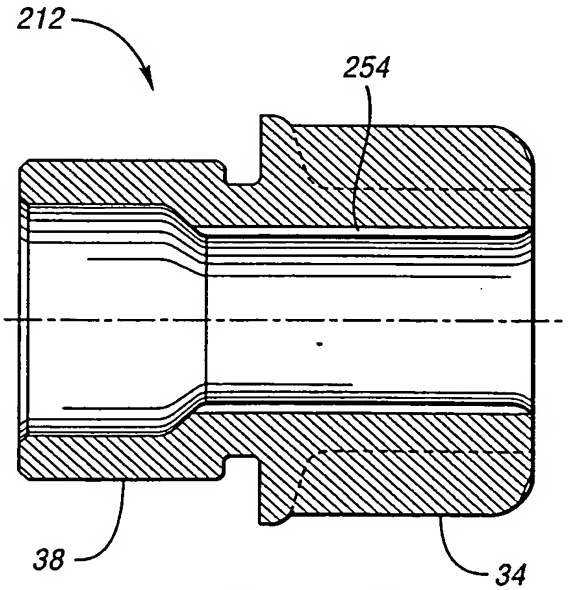

Fig. 8

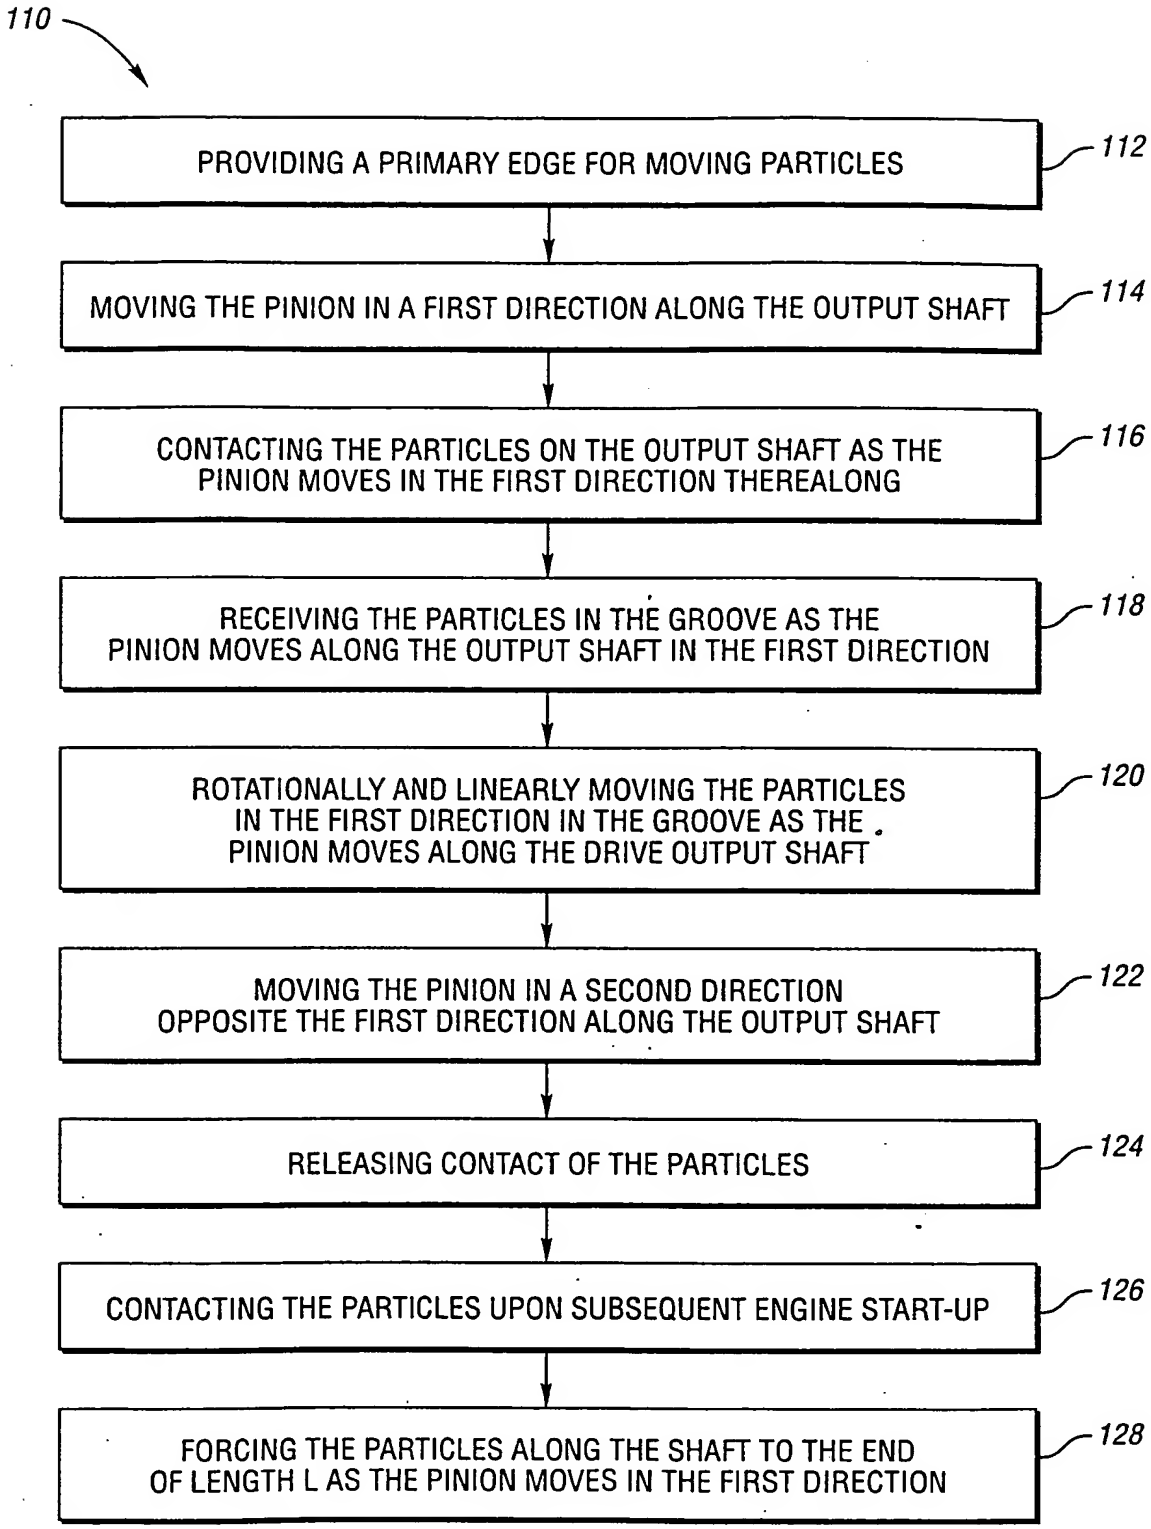
110
PROVIDING A PRIMARY EDGE FOR MOVING PARTICLES
112
MOVING THE PINION IN A FIRST DIRECTION ALONG THE OUTPUT SHAFT
114
CONTACTING THE PARTICLES ON THE OUTPUT SHAFT AS THE PINION MOVES IN THE FIRST DIRECTION THEREALONG
116
RECEIVING THE PARTICLES IN THE GROOVE AS THE PINION MOVES ALONG THE OUTPUT SHAFT IN THE FIRST DIRECTION
118
ROTATIONALLY AND LINEARLY MOVING THE PARTICLES IN THE FIRST DIRECTION IN THE GROOVE AS THE PINION MOVES ALONG THE DRIVE OUTPUT SHAFT
120
MOVING THE PINION IN A SECOND DIRECTION OPPOSITE THE FIRST DIRECTION ALONG THE OUTPUT SHAFT
122
RELEASING CONTACT OF THE PARTICLES
124
CONTACTING THE PARTICLES UPON SUBSEQUENT ENGINE START-UP
126
FORCING THE PARTICLES ALONG THE SHAFT TO THE END OF LENGTH L AS THE PINION MOVES IN THE FIRST DIRECTION
128

Fig. 6